



24 hours
BUILT TO WORK
www.staxx-mhe.com




TYSENTECH
www.tysetech.com

Pay A Little More Save Much More


BUILT TO
WORK
24
HOURS

SMART SIZE

ALMOST SAME

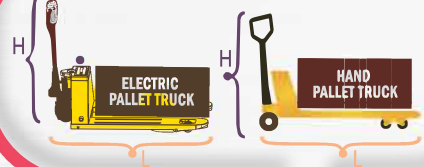


LIGHT WEIGHT

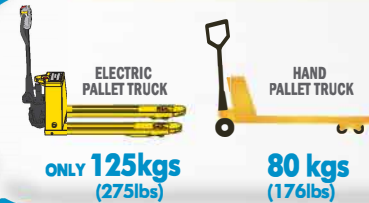


EFFICIENCY

3 Times Higher Than Manual Pallet Truck

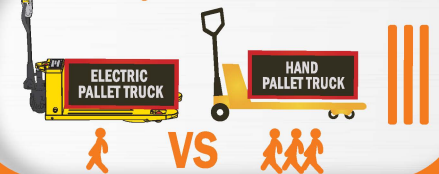


EASY MAINTENANCE



LIFETIME

3 Times Longer Than Manual Pallet Truck

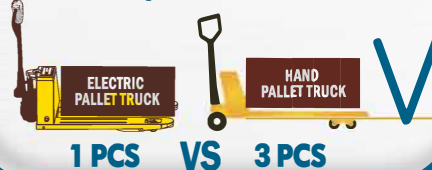

HIGH RETURN OF INVESTMENT
PRODUCTIVE
1 MONTH COST
RECOVERY
Safety

GO

Optimize
your operations
SAVE LABOUR
Release manpower
Brake any time anywhere

● MAINTENANCE SO EASY !!

**5 YEAR
WARRANTY
CHASSIS**



**Brushless drive motor,
maintenance free**



**Lithium battery
maintenance free**



Recharge Alert



Error code display



6s Replace Battery





60s Replace Drive Wheel

● PERFORMANCE



Traveling speed

UNLADEN	5Km/h (3.1mph)
LADEN	4Km/h Full Electric (2.5mph)
	3.5Km/h Semi-Electric (2.2mph)



Gradeability

● CHARACTERISTICS

Closer look into

Notes: "★" --Available with different options.



SMART FUNCTION


STAXX
STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

SMART FUNCTION

01

Turtle Speed

Horn Remains Pressed & Forward 2 times




SMART FUNCTION

02

Up-Right Drive

Reverse Button & Forward Throttle Remain Pressed, Power On




SMART FUNCTION

03



Engineering Mode (Brake Release)

Horn Remains Pressed, Power On




⚠ In up-right drive mode, vehicle will move when handle is operated at any position. Please avoid misoperation.

⚠ Brake release mode is only for emergencies, not allowed for vehicle with normal conditions.

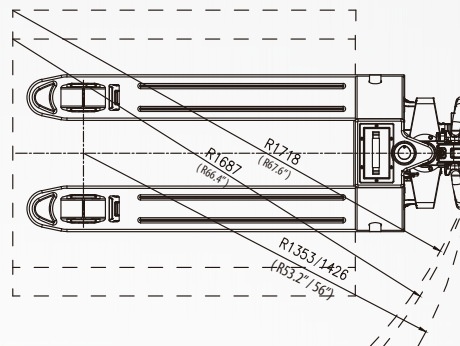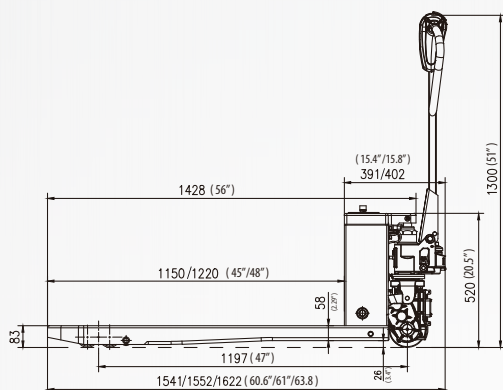

MODEL		PPT18H		PPT18HQ		EPT15H		EPT18H		PPT40H		PPT40HQ		EPT33H		EPT40H	
CHARACTERISTICS																	
1.1	Capacity	kg	1800	1800	1500	1800		lb	4000	4000	3300	4000					
1.2	Load center	mm	600	600	600	600		in	23.6	23.6	23.6	23.6					
1.3	Standard overall fork width	mm	550/685	550/685	550/685	550/685		in	21.6/27	21.6/27	21.6/27	21.6/27					
1.4	Fork length	mm	1150/1220	1150/1220	1150/1220	1150/1220		in	45/48	45/48	45/48	45/48					
1.5	Overall length	mm	1552/1622	1552/1622	1552/1622	1552/1622		in	61/63.8	61/63.8	61/63.8	61/63.8					
1.6	Overall height (with tiller)	mm	1300	1300	1300	1300		in	51	51	51	51					
1.7	Rear body width	mm	550/685	550/685	550/685	550/685		in	21.6/27	21.6/27	21.6/27	21.6/27					
1.8	Minimum turning radius	mm	1353/1426	1353/1426	1353/1426	1353/1426		in	53.2/56	53.2/56	53.2/56	53.2/56					
PERFORMANCE																	
2.1	Max.Traveling speed	laden	km/h	3.5	3.5	4	4		mph	2.2	2.2	2.5	2.5				
		unladen	km/h	5	5	5	5		mph	3.1	3.1	3.1	3.1				
2.2	Gradeability	laden	%	5	5	6	6		%	5	5	6	6				
		unladen	%	20	20	20	20		%	20	20	20	20				
2.3	Traveling	kw	DC 0.75 Brushless	DC 0.75 Brushless	DC 0.75 Brushless	DC 0.85 Brushless		kw	DC 0.75 Brushless	DC 0.75 Brushless	DC 0.75 Brushless	DC 0.85Brushless					
2.4	Lifting	kw	Hydraulic	QUICK LIFT	DC 0.5	DC 0.5		kw	Hydraulic	QUICK LIFT	DC 0.5	DC 0.5					
BATTERY																	
4.1	Voltage	v	48	48	48	48		v	48	48	48	48					
4.2	Capacity/type	Ah	10 Ah Lithium	10 Ah Lithium	10 Ah Lithium	10 Ah Lithium		Ah	10 Ah Lithium	10 Ah Lithium	10 Ah Lithium	10 Ah Lithium					
BRAKE TYPE																	
5.1	Travel brake		Regenerate	Regenerate	Regenerate	Regenerate			Regenerate	Regenerate	Regenerate	Regenerate	Regenerate				
5.2	Brake		Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic			Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic				
CONTROLLER																	
6.1	Controller		STAXXB1501	STAXXB1501	STAXXB1501	STAXXB1501			STAXXB1501	STAXXB1501	STAXXB1501	STAXXB1501	STAXXB1501				

| MAKE
YOUR JOB
EASIER!

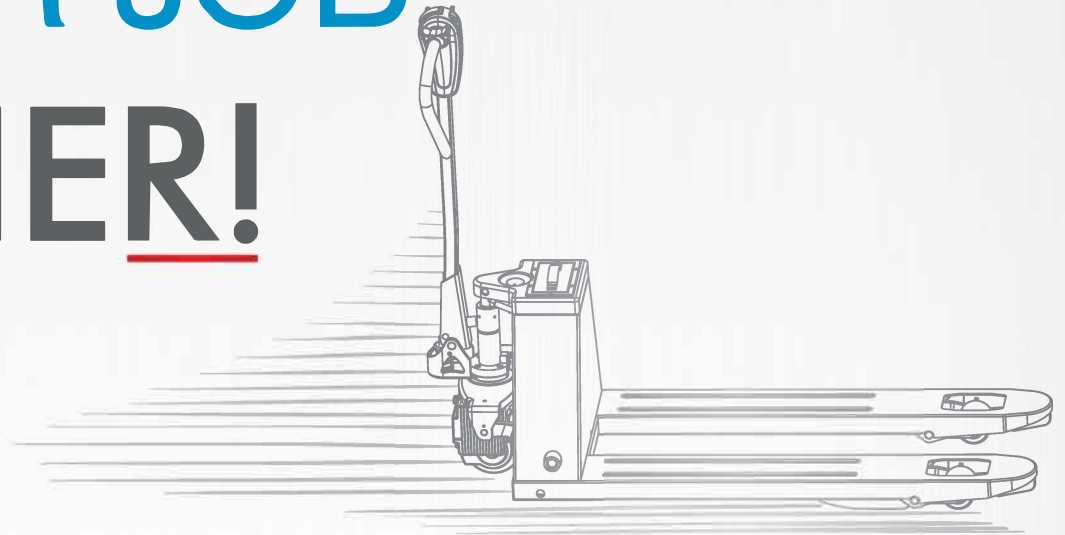

STAXX[®]
STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

Tysen Technologies Private Limited

Tel: (65) 6694 3802 | Fax: (65) 6694 3801 | E: info@tysentech.com

Add.: 152 Tuas South Avenue 2,

West Point Bizhub, Singapore 637181