

Counterbalanced Electric Stacker



Model:
CPD05W
CPD10W
CPD15W-II



- Advantages:**
- Long handle structure makes it steering light and flexible
 - Upper horizontal driving wheel ensures easy installation and maintenance
 - Tilting system keeps loading and stacking more easier
 - Meter with BDI, prolonging the battery's using time.
 - With emergency stop switch and electricity lock button.



Standard handle




Perfect mast design gives wide-enough view




Perfect for loading and unloading shipping containers or trucks since there are no stabilization legs to get in the way.

1KG=2.205LB 1INCH=25.40MM				
General Information	1.2	Manufacturer's type designation		
	1.3	Drive: electric (battery type, mains, ...), diesel, petrol, fuel gas		
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		
	1.5	Rated capacity/rated load		
	1.6	Load centre distance		
Weight	1.8	Load distance, centre of drive axle to fork		
	1.9	Wheelbase		
	2.1	Service weight		
	2.2	Axle loading, laden front/rear		
	2.3	Axle loading, unladen front/rear		
Tyres/Chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		
	3.2	Tyre size, front		
	3.3	Tyre size, rear		
	3.4	Additional wheels (dimensions)		
	3.5	Wheels, number front/rear (x = driven wheels)		
Dimensions	3.6	Tread, front		
	3.7	Tread, rear		
	4.1	Tilt of mast/fork carriage forward/backward		
	4.2	Height, mast lowered		
	4.4	Lift		
Performance Data	4.5	Height, mast extended		
	4.9	Height drawbar in driving position min./max.		
	4.19	Overall length		
	4.20	Length to face of forks		
	4.21	Overall width		
Motors	4.22	Fork dimensions DIN ISO 2331		
	4.32	Ground clearance, centre of wheelbase		
	4.34.1	Aisle width for pallets 1000 x 1200 crossways		
	4.34.2	Aisle width for pallets 800 x 1200 lengthways		
	4.35	Turning radius		
Additional Data	5.1	Travel speed, laden/unladen		
	5.2	Lift speed, laden/unladen		
	5.3	Lowering speed, laden/unladen		
	5.8	Max.Gradeability, laden/unladen		
	5.10	Service brake		
	6.1	Drive motor rating S2 60 min		
	6.2	Lift motor rating at S3 15%		
	6.4	Battery voltage/nominal capacity K20		
	6.5	Battery weight		
	10.7	Sound pressure level at the driver's seat		

* Option: CPD05W: Lithium battery 24V/60AH (Charger 24V/25A)
CPD10W: Lithium battery 24V/100AH (Charger 24V/25A)
CPD15W-II: Lithium battery 24V/150AH (Charger 24V/50A)

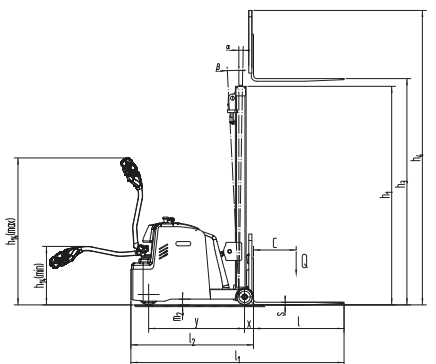

CPD05W/10W

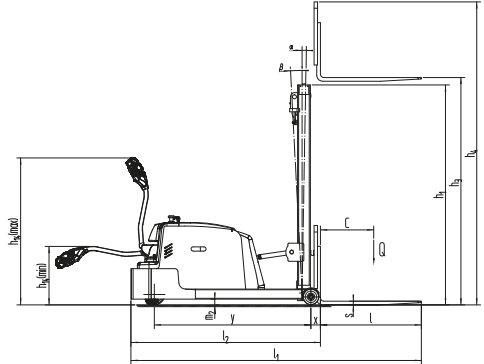

CPD15W-II

