



A-SAFE

Est. 1984

eFlex™ ForkGuard™ Kerb Barrier



Designed to provide
ground level protection for
walls, buildings and equipment.

The eFlex ForkGuard deflects vehicle forks
in shallow angle or low-force impacts. It also acts
as a pallet stop or buffer preventing stored goods
encroaching into pedestrian areas or walkways.

Floor mounted and bolted from above, the eFlex
ForkGuard integrates with A-SAFE barriers when
installed together.




Code of Practice
for Workplace
Safety Barriers

PAS13
2017




Tysen Technologies Private Limited
Tel: (65) 6694 3803 | Fax: (65) 6694 3801 | E: info@tysentech.com
Add.: 152 Tuas South Avenue 2, West Point Bizhub, Singapore 637181

Engineered for performance

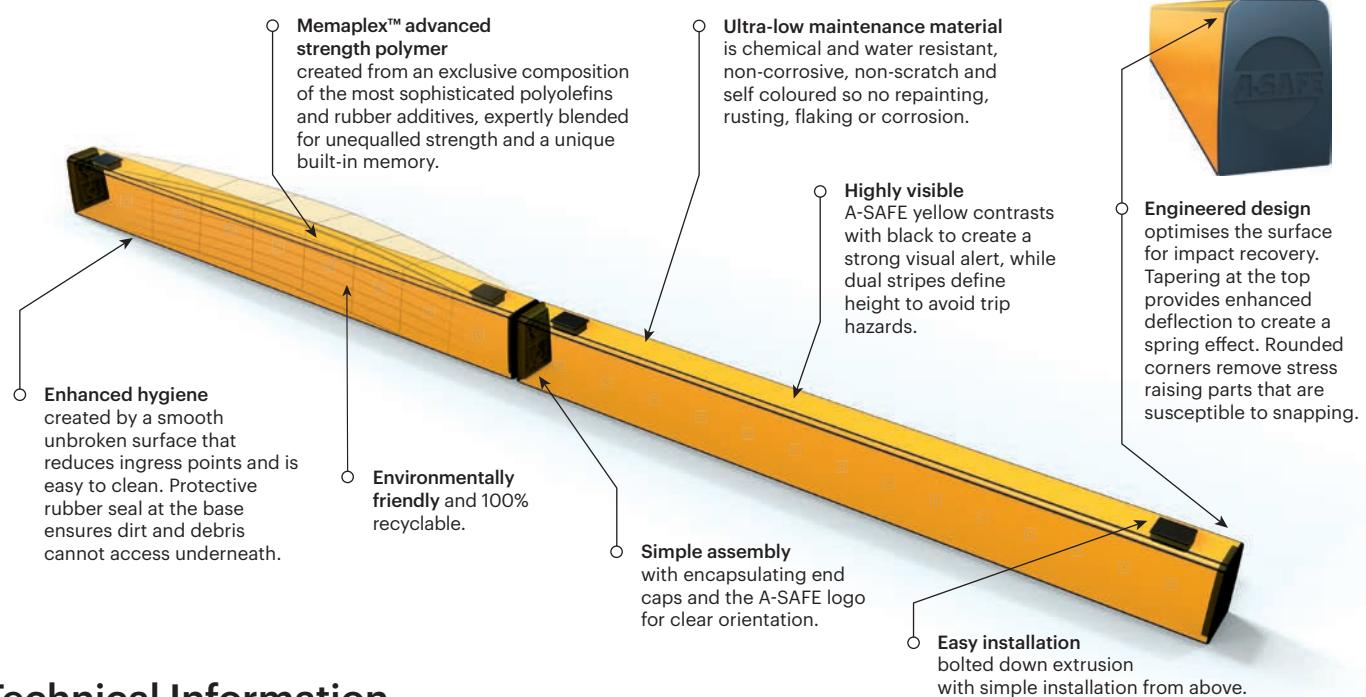

Technical Information


Impact Test
Max Energy (Joules) at 90° 3,000
Deflection at Max Energy 300mm

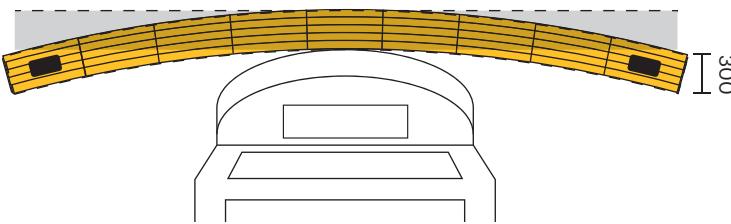

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent

** Light stability scale 1 is very poor and 8 is excellent

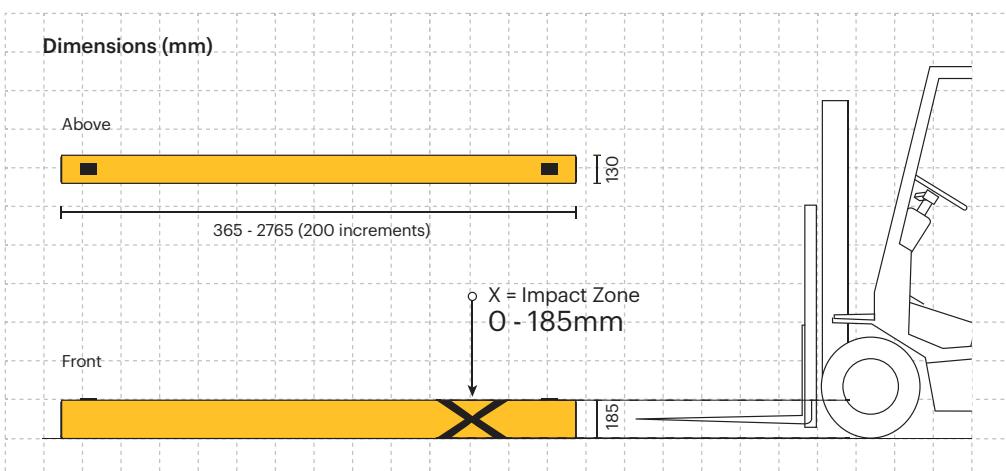

Colour Combinations

Standard Yellow RAL 1007* PANTONE 7548*
Standard Black RAL 9005* PANTONE Black

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

A-SAFE Headquarters

Habergham Works, Ainleys Industrial Estate, Elland, HX5 9JP, West Yorkshire, United Kingdom.
www.asafe.com

