



**eFlex<sup>TM</sup>**

## Single RackEnd Barrier

# A-SAFE



Designed to protect the end of racking aisles where turning vehicles and equipment can impact vulnerable racking structures.

The Single Rail version will absorb and deflect repeated contact from vehicles with lower centres of gravity, preventing damage to racking systems.

The circular end posts provide enhanced protection at the barrier ends which are most susceptible to impact. Innovative spinning collars further deflect and dissipate impact forces.



**TYSENTECH**  
www.tysentech.com

Tysen Technologies Private Limited

Tel: (65) 6694 3803 | Fax: (65) 6694 3801 | E: info@tysentech.com

Add.: 152 Tuas South Avenue 2, West Point Bizhub, Singapore 637181

Tested to the  
global benchmark  
in barrier safety

**bsi. PAS 13**

Code of Practice for  
Workplace Safety  
Barriers

# Engineered for performance

**Memaplex™ advanced strength polymer** created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

**Unrivalled recovery** through a unique built-in memory that allows the barrier to flex, cushion and reform repeatedly upon impact, saving vast amounts in barrier and vehicle repairs.

**Huge return on Investment** from incident prevention and downtime avoidance as rails, vehicles, floors and infrastructure do not need replacing or repair.

**Rotating wear collars** deflect force from repeat glancing blows preventing expensive on-going maintenance costs.

**Self coloured and UV stabilised** for continued high visibility and long lasting aesthetics with no repainting.

**Ultra-low maintenance material** is chemical and water resistant, non-corrosive, non-scratch and self coloured so no repainting, rusting, flaking or corrosion.


**Environmentally friendly** and 100% recyclable.

**Zinc nickel, electrophoretic** coating on base plates as standard, provides advanced protection against corrosion damage.

## ADDITIONAL BASE OPTIONS



Countersunk Bolts



Galvanised Steel



Stainless Steel 316 Standard




Stainless Steel 316 Countersunk

## Technical Information

Impact Test	Impact Angle on 2000mm Post Centres			
	90°	67.5°	45°	22.5°
Mid Rail Max Energy (Joules)	4,000	4,686	8,000	27,314


End Post Max Energy (Joules) - 90°	3,600
------------------------------------	-------

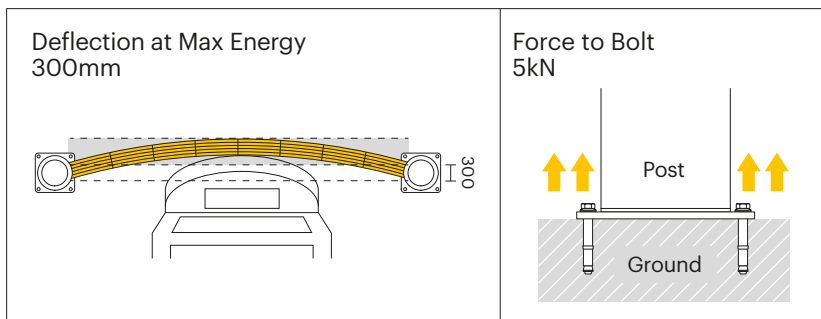

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

\* Weathering scale 1 is very poor and 5 is excellent

\*\* Light stability scale 1 is very poor and 8 is excellent

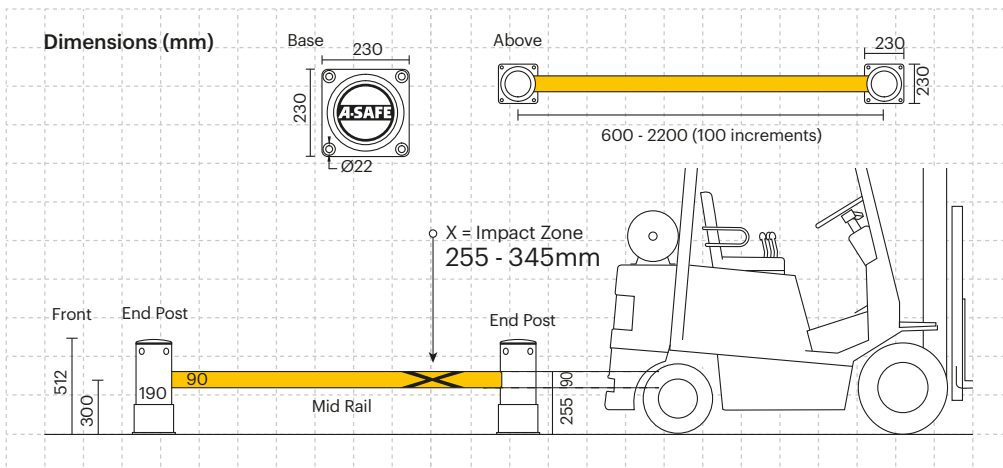


## Colour Combination

### Post



### Rail



\*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

A-SAFE UK Ltd

Ainley House, Ainleys Industrial Estate, Elland, Halifax HX5 9JP United Kingdom

www.asafe.com

