

SlowStop® Rebounding Horseshoe Bollard – Type 1 (SS-T1Y-59-HS-106)



www.slowstop.eu

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base


Diameter: 76,1 mm (5 mm wall)

Height: 59 cm to centerline

Width: 106 cm centers
114 cm outside uprights
126 cm overall footprint


Set Screws: M12 x 1,75—6mm Hex

Weight: 46 kg

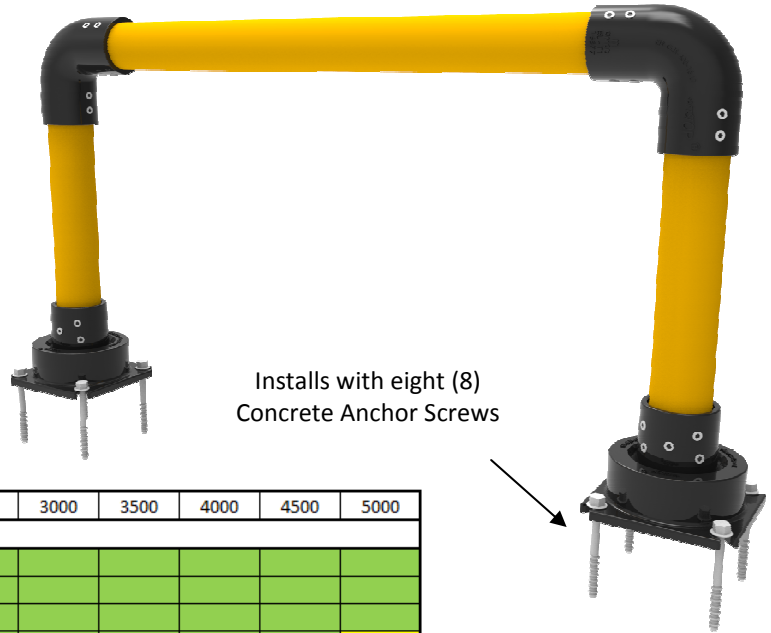

Installs with eight (8) Concrete Anchor Screws

MASS (KG)	500	1000	1500	2000	2500	3000	3500	4000	4500	5000
SPEED (KPH)										
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
7.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
7.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
8.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
8.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
9.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
10.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green



SPECIFICATIONS

- Stopping Power Rating: 7546 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

RECOMMENDED USES

- Powered Industrial Trucks to 3000 kg lift capacity
- Equipment and Conveyor Guarding
- Toll and Security Booths
- Utility and Kiosk Protection
- Access Denial
- Fuel Pump Protection
- Storage Tanks
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448

Email: info@slowstop.eu
www.slowstop.eu



QR: Download Spec Sheets
©2019 SlowStop. All rights reserved. 15-NOV-2018